

# USM-2, 32A/63A 230V



USM-2, 32A 230V



USM-2, 63A 230V

VARENR.	TYPE
73007	Minisentral USM-2 32A* 230V 00208-R
73008	Minisentral USM-2 63A* 230V 01208-R
73009	Minisentral USM-2 63A** 230V 01208-R

\* Felles jordfeilbryter

\*\* Jordfeilbryter på alle kurser

VARENR.	RESERVEDELER
70006	Stativ/fot til USM-2
75247	Sikringsvindu PCE 12 moduler
75221	Apparatinntak innfelt 363-9
75219	Apparatinntak innfelt 332-9
75209	Stikkontakt innfelt rett 363-9
75205	Stikkontakt innfelt rett 332-9
75200	Stikkontakt innfelt 2/16+j (Schuko)
75103	ABB automatsikring C 32A 3P
75101	ABB automatsikring C 16A 2P
75116	ABB jordfeilbryter 63A/30mA 4P
75115	ABB jordfeilbryter 40A/30mA 4P
75111	ABB jordfeilautomat C 32A/30mA 3P
75124	ABB jordfeilautomat C 16A/30mA 2P

- **Vekt:** 9 kg
- **Kapasitet:** 32A 230V 12kW  
63A 230V 24kW
- **Mål:** 294x559x273mm (BxHxD)

### Vern 230V

#### 73007

ABB aut.sikring C 16A 2P 4 stk.

ABB j.f.bryter 40A/30mA 4P 1 stk.

#### 73008

ABB aut.sikring C 32A 3P 2 stk.

ABB aut.sikring C 16A 2P 4 stk.

ABB j.f.bryter 63A/30mA 4P 1 stk.

ABB j.f.bryter 40A/30mA 4P 1 stk.

#### 73009

ABB j.f.automat C 32A/30mA 3P 2 stk.

ABB j.f.automat C 16A/30mA 2P 4 stk.

### Antall kW som kan føres i kabel 230V

3x2,5+j 316-9 6kW

3x6+j 332-9 12kW

3x16+j 363-9 25kW

3x35+j 3125-9 50kW

### Bestykning

32A 230V 00208-R




63A 230V 01208-R




Andre bestykninger på forespørsel.

73007 USM-2 32A 230V 00208-R

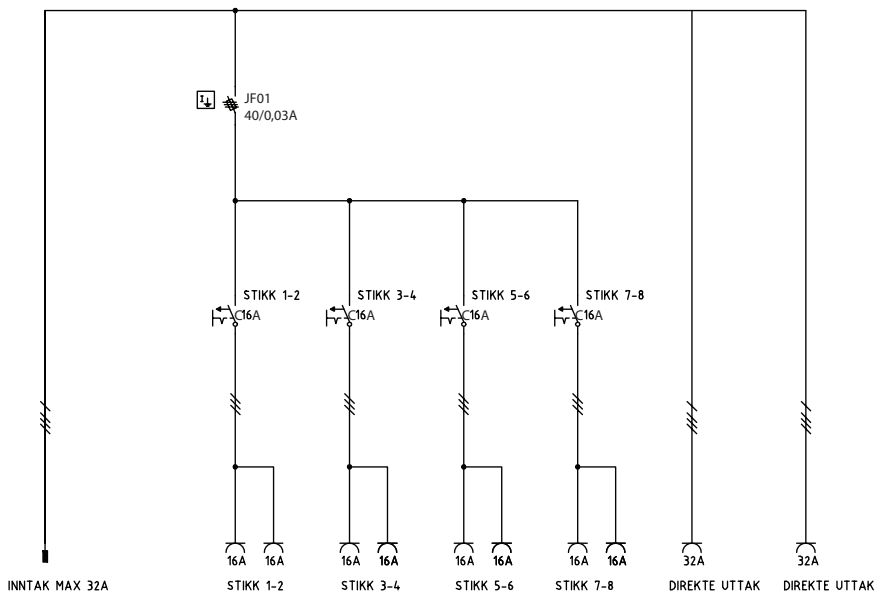

73008 USM-2 63A 230V 01208-R

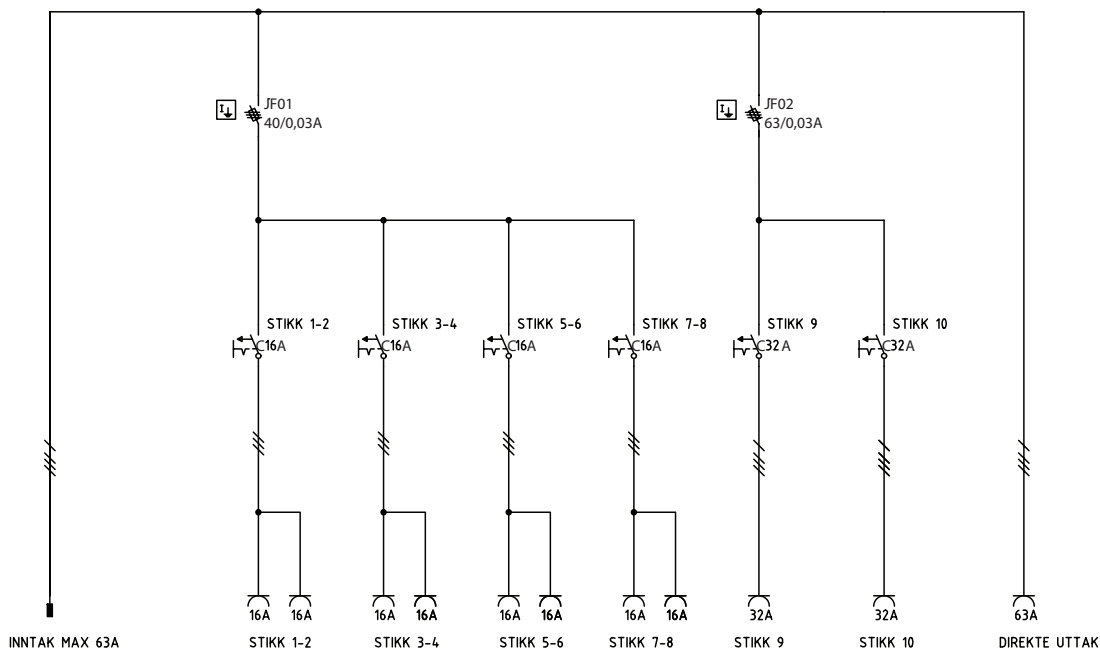

73009 USM-2 63A 01208-R 230V -jordfeilbryter på hver kurs

