
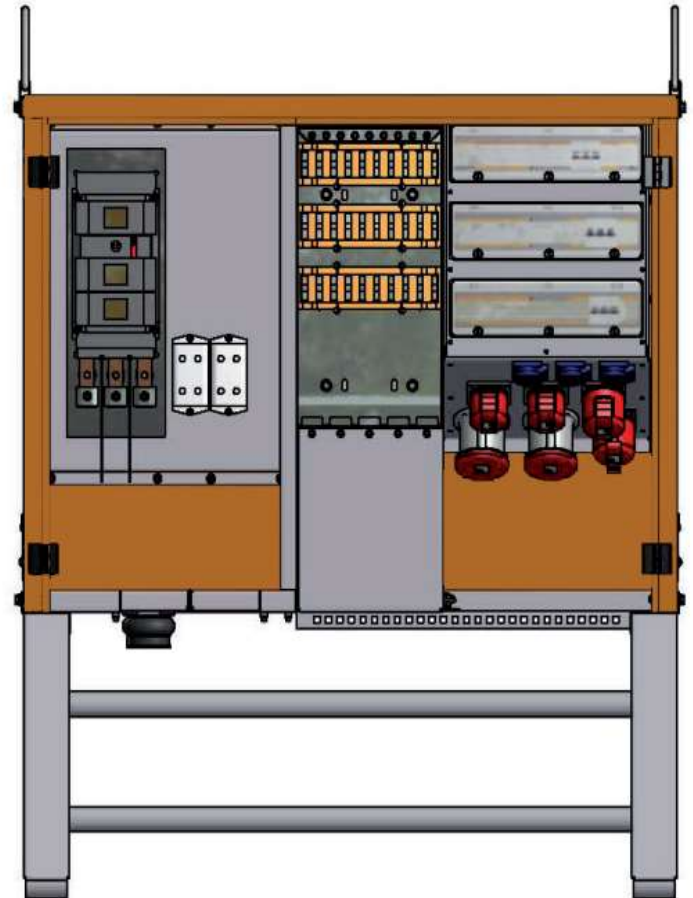


BESKRIVNING

- Fördelningscentral 250A
- Solid kapsling i pulverlackerad aluminium.
- Låsbara dörrar.
- Centralen är försedd med lyftöglor samt benstativ för truckgafflar.
- 630A Skenpaket.
- Centralen är konstruerad enligt EN 61 439-4.
- Alla säkringar är av typen dvärgbrytare med C-karakteristik.
- Kapslingsklass: IP44
- Kortslutningshållfasthet $I_{cc} = 25\text{kA}$.
- Godkännande: CE

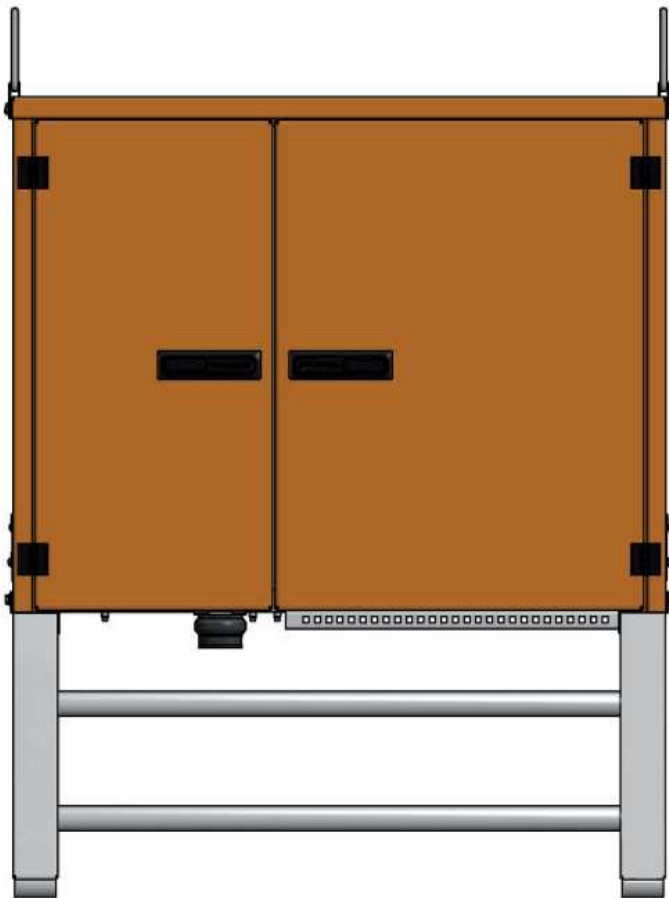



TEKNISK DATA

Modell	Best-nr	Inkommande Säkringslastbrytare 250A	Fast utgång SLK 160 AC23 250A AC22 400A	Fast utgång SLK 400 AC23 250A AC22 400A	Uttag Schuko 2-pol 230V	Uttag CEE 5-pol 400V	Uttag CEE 5-pol 400V	Uttag CEE 5-pol 400V	JFB	JFB
		NH1	NH00	NH1-2	16A	16A	32A	63A	0,03A	0,3A
FSF 250/21/3222-13	S19300-SE	1	2	1	3	2	2	2	1	3

Längd: 1293 mm
Bredd: 1163 mm
Djup: 714 mm
Vikt: 99 kg

Figure 1 is a single-line diagram of a power distribution system. It shows a main busbar on the left with four outgoing lines labeled SLK 160, SLK 160, SLK 160, and SLK 400. These lines lead to a series of circuit breakers (F01-F09) and fuses (JF01-JF04). The system is divided into three main sections. The first section has a 250A busbar and a 100A circuit breaker (Q00). The second section has a 63/0.03 fuse (JF01) and a 100A circuit breaker (Q01). The third section has a 63/0.3 fuse (JF02) and a 125A circuit breaker (Q01). The final section has a 63/0.3 fuse (JF03) and a 125A circuit breaker (Q01). The diagram also shows various load points (X01-X09) and their ratings.

Angivna mått i mm.

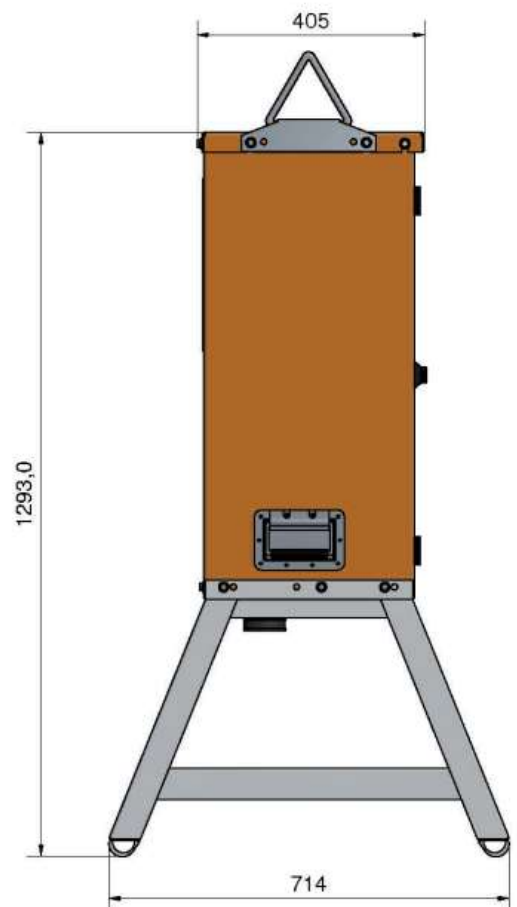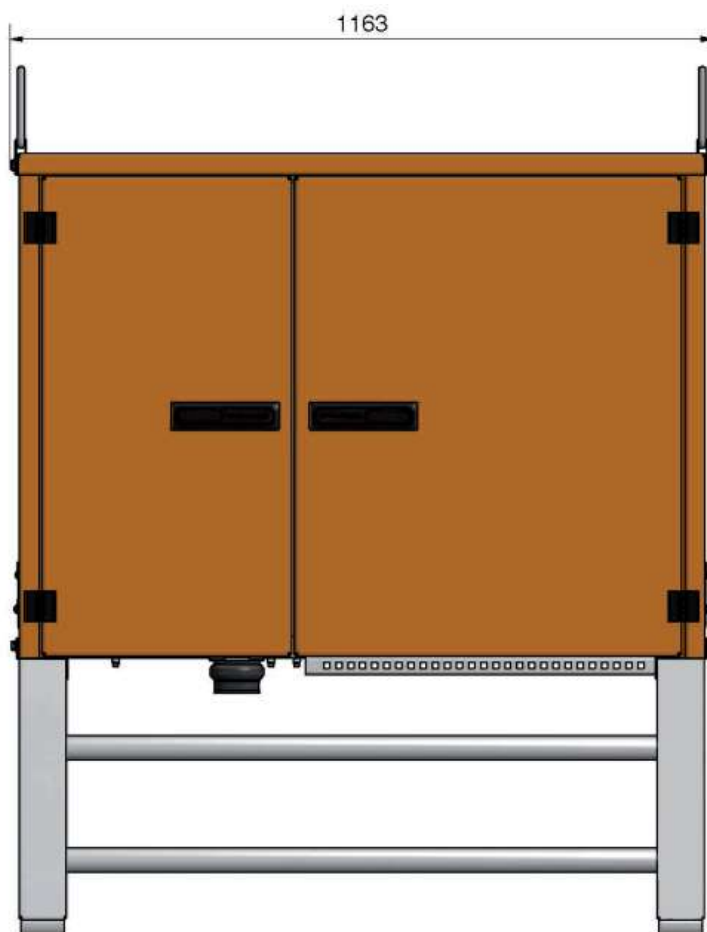

Vikt: 99 kg